

TECHNICAL DATA SHEET

Sheet EVG-003

TEXTURE CRYSTAL FLOOR GLASS TILE

The Texture Crystal Floor Glass Tile

The Glass Crystal Floor Tiles are produced from 12mm thickness float glass. The carven surface is achieved by additional glass powder melted to the required pattern.

Due to the thickness, the Floor Crystal Glass Tile must be cut with a continuous-segment Diamond Blade or Diamond Wire wet saw. Use of Score and Brake not recommended. White non-rigid adhesive is recommended.


For specific installation grout or adhesive, we recommend you to contact your local preferred adhesive manufacturer.

APPLICATIONS:

- Internal surfaces – wall and floor
- Non suited for high traffic areas (tracking)
- Suitable for under-floor heating areas

PRODUCT DATA:

- Crystal Floor Glass Tile is manufactured in 12mm
- Available in most standard colours*
- Sizes available from 200x200mm up to 457x457mm*
- Available in a Matt, Brushed and Carven Square, Round, Trinity and Crescent
- Refer to catalogue for standard full range of products and sizes

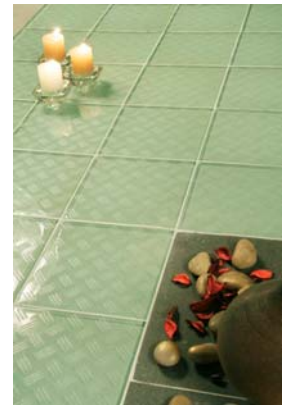

SLIP RESISTANCE TEST REPORT (AS/NZS 4586:2004)

FINISH	RESULT	CLASS
BRUSHED – Mean BPN	23	Z
-Mean Overall Acceptance Angle	13.6°	R10
CARVEN SQUARE – Mean BPN	20	Z
-Mean Overall Acceptance Angle	11.9°	R10
CARVEN TRINITY – Mean BPN	17	Z
-Mean Overall Acceptance Angle	9.9°	R9
MATT/CARVEN ROUND and CRESCENT	Not Available	Not Available

*conditions apply